

Sealed

→ 83 139

- IP66/IP67 protection,
- Protection against hydrocarbons, detergents
- Double break switching
- Double insulated or Atex flameproof casing
- Choice of actuators



Main specifications

		Standard 83 139 0	Low temperature 83 139 5	Double insulated 83 139 2	Flameproof 83 139 1
Function	Connections				
I (changeover)	Standard lead output	83 139 003	83 139 503	-	83 139 103
I (changeover)	Lead output on right/left	●	●	-	●
I (changeover)	Cable output	-	-	83 139 201	-
Electrical characteristics					
Rating nominal / 250 V AC (A)		6	6	6	6
Rating thermal / 250 V AC (A)		11	11	11	11
Mechanical characteristics					
Maximum operating force (N)		3	3	3	3
Min. Release force (N)		0.6	0.6	0.6	0.6
Maximum total travel force (N)		4	4	4	4
Max. permitted overtravel force (N)		10	10	10	10
Rest position max. (mm)		A= 8.8 B= 9.8	A=8.8 B=9.8	B=9.8	B = 9.8
Tripping point depending on position of fixing holes (mm)		A = 7.7 ^{±0.4} B = 8.7 ^{±0.4}	A=7.7 ^{±0.4} B=8.7 ^{±0.4}	B = 8.7 ^{±0.4}	B = 8.7 ^{±0.4}
Differential travel (mm)		0.35 ±0.1	0.35 ±0.1	0.35 ±0.1	0.35 ±0.1
Min. overtravel (mm)		0.25	0.25	0.25	0.25
Ambient operating temperature (°C)		0 → +85	-40 → +85	-40 → +85	-40 → +70
Mechanical life (operations)		10 ⁷	5 x 10 ⁶	5 x 10 ⁶	5 x 10 ⁶
Contact gap (mm)		0.3 x 2	0.3 x 2	0.3	0.3 x 2
Weight (g)		37	37	45	37
Fixations					
Fixings - 4 holes (standard)		A	A	-	-
Fixing - 2 holes		B	B	B	B
Connections					
Connection		4 flexible leads 0.75 mm ² length 0.50 m Ø ext. 2 mm	4 flexible leads 0.75 mm ² Ø ext. 2 mm	Cable 3 x 0.75 mm ² length 0.50 m Ø ext. 5.2 mm	4 flexible leads 0.75 mm ² length 0.50 mm Ø ext. 2 mm
Standard wire output		S	S	-	S
Wire output on right		D	D	-	D
Wire output on left		G	G	-	G
Comments					
Components					
Material					
- Case : polyester UL94V0					
- Contacts : silver					
- Membrane : nitrile for 83 139 0 silicone for 83 139 1/2/5					
Levers					
- stainless steel					
- Roller : polyamide					
Characteristics specific to 83 139 1					
- Conform to standards EN 60079-0 and 60079-1					
- Conform to the European directive 2014/34/EU concerning potentially explosive atmospheres					
- Classification / Product marking: II 2 G - Ex d IIC Gb					
- CE Test Certificate type n° LCIE 02 ATEX 0034 U					
- Notification number : LCIE 11 ATEX4001					

Product adaptations




- Special levers
- Special leads, cables, cable harnesses
- Specific operating temperatures
- Two-pole version: 831398
- UL approval

Principles

Double break changeover switch
Types 83 139 0 / 83 139 1 / 83 139 5




Single break changeover switch
Type 83 139 2



Curves

Operating curve for types 83 139 0 / 1 / 2 / 5




- 1 Number of cycles
- 2 Resistive circuit
- 3 Inductive circuit
- 4 Mechanical life limit
- 5 Current in Amps

Dimensions


→ Product

83 139 0 - 5
A fixing = 4 holes

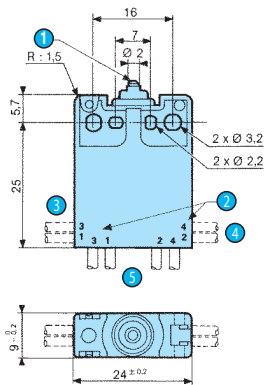


- 1 R : 1.5 spherical
- 2 Lead reference on casing
- 3 Lead output on left
- 4 Lead output on right
- 5 Standard lead output (black)
 - 1 = black lead
 - 2 = brown lead
 - 3 = grey lead
 - 4 = blue lead

83 139 0 - 1 - 5
B fixing = 2 holes

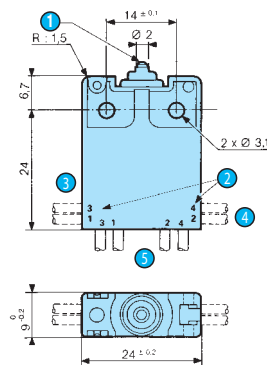

- 1 R : 1.5 spherical
- 2 Lead reference on casing
- 3 Lead output on left
- 4 Lead output on right
- 5 Standard lead output (black)
 - 1 = black lead
 - 2 = brown lead
 - 3 = grey lead
 - 4 = blue lead


83 139 2
B fixing = 2 holes

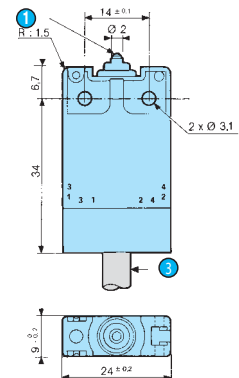


- 1 R : 1.5 spherical
- 3 Cable 3 x 0.75 mm² length 0.50 m
 - 1 = black lead
 - 2 = brown lead
 - 4 = blue lead

→ Actuator mounting positions


Type 139
A fixing = 4 holes

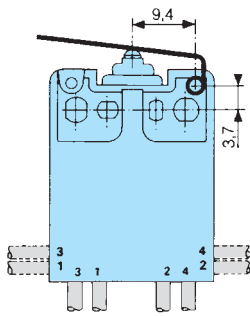


Type 139
B fixing = 2 holes



Type 161
A fixing = 4 holes

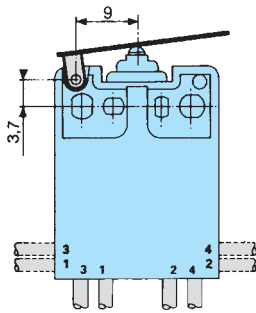


Type 161
B fixing = 2 holes




→ Actuators


139 EX

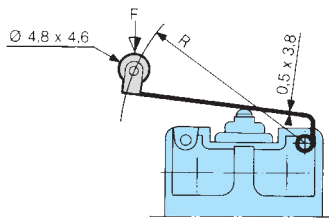


139 AX




161 A

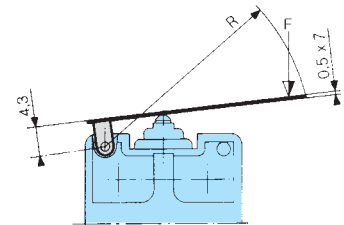


161 E

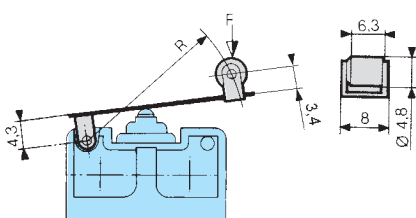

161 F

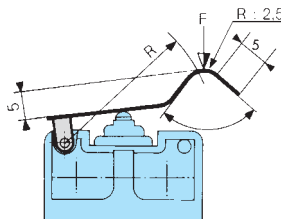



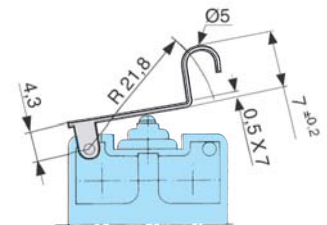

161 G





Actuators and fixing positions

Part numbers for standard actuators

		79 215 740		70 507 524		79 215 742		70 507 529	
Actuators		Flat 139 AX F29.7 mm**		Roller 139 EX F28.7 mm**		Flat 161A R14.2 - F25.4 mm		Roller 161E R13.6 - F24.1 mm	
									
Operating force - max.	N	1.5		1.5		2.6		1.7	
Release force - min.	N	0.2		0.2		0.35		0.2	
Differential travel	mm	1.5		1.5		0.7		1.25	

Part numbers for standard actuators

		70 507 528		79 218 651	
Actuators		Flat 161F F22.3 mm		Dummy roller 161 G F21.8	
					
Operating force - max.	N	2		2	
Release force - min.	N	0.2		0.2	
Differential travel	mm	1.1		1.1	

Unless indicated, flat actuators and roller actuators are delivered unmounted.

** Factory fitted

Note : We recommend greasing the switch pushbutton lightly when fitting actuators.

Other information

Mounting - Operation

See basic technical concepts

Warning:

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet Automatismes SAS and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.