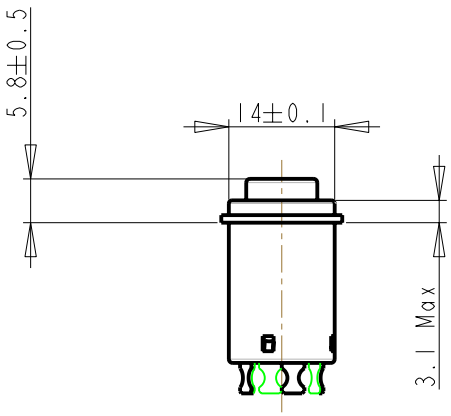


POUSSOIR NOIR

ENDURANCE MECANIQUE: 100 000 CYCLES

ETANCHEITE FACE AVANT SUIVANT:

MIL STD 810 D-506.2 METHODE 2

BLACK BUTTON

MECHANICAL STRENGTH: 100 000 CYCLES

WATERPROOF FRONT FACE IN COMFORMITY WITH:

MIL STD 810 D-506.2 METHODE 2

CARACTERISTIQUES ELECTRIQUES ELECTRICAL CHARACTERITICS

BAS NIVEAU


TENSION	30 VDC	VOLTAGE
COURANT	0.5 mA à 50 mA	CURRENT
ENDURANCE ELECTRIQUE PAR DIRECTION	100 000 cycles	ELECTRICAL LIFE PER DIRECTION

LOW CURRENT

AUTRES CARACTERISTIQUES.IDENTIQUE A :

OTHER CHARACTERISTICS IDENTICAL TO :

FT83450001FR



83450037

Product:

A	CREATION	Modified by	M_VERDIER	23/06/2015
		Verified by	P_BURTIN	23/06/2015
	IA2015002	Authorized by	P_GIROUD	23/06/2015

Toler. gene. lin ± 1 mm

Toler. gene. Ang ± 5 degres

This document is the property of Crouzet-Automatismes.
It's contents cannot be reproduced or divulged without the company's written approval.
The product data and specifications found on this document
do not constitute any contractual obligation.
Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications.
All rights of reproduction, modification, reprinting, and translation reserved for all countries

Crouzet

General
Raw surface Ra

Scale 1/1

2, rue du Dr ABEL
BP 59, 26902,
Valence CEDEX 9
France

Customer:

Customer Ref.:

Designation/FR: **PLAN FT BP UNI NOIR COURT DIAM 14 ETANCHE BN**

Designation/GB: **WATERPR. SHORT PUSH-BUT. TAC-EFF ONE POLE CHANGE OVER LOW CURR.**

PFT001:0<C>;0<M>

Dispatching D1

Department: CT

NATO code: FAOX2

Design by	M_VERDIER	23/06/2015
Verif. by	P_BURTIN	23/06/2015
Authorized by	P_GIROUD	23/06/2015

DATA SHEET - FICHE TECHNIQUE

FT83450037GB

Index	Format	Folio
A	A4	1/1