


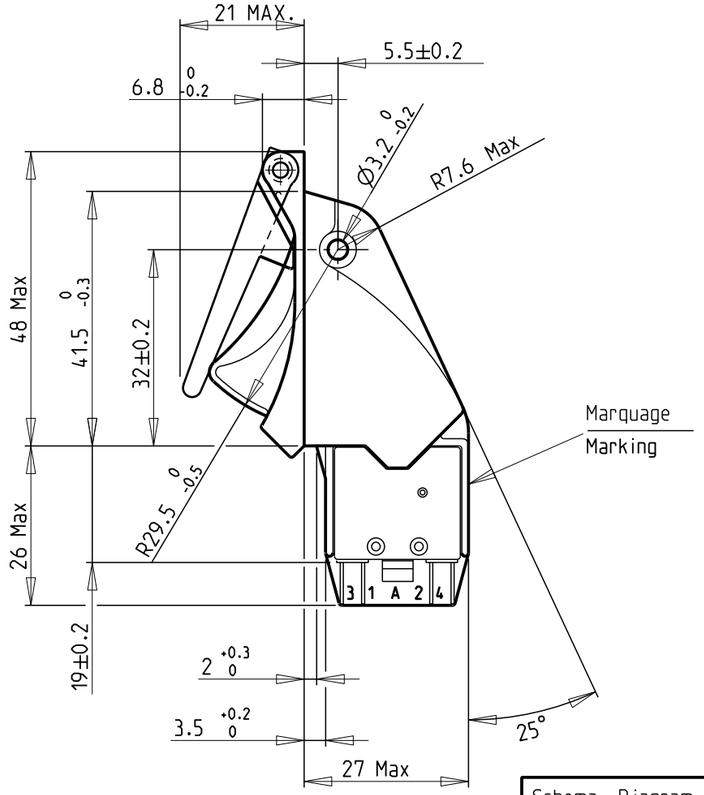


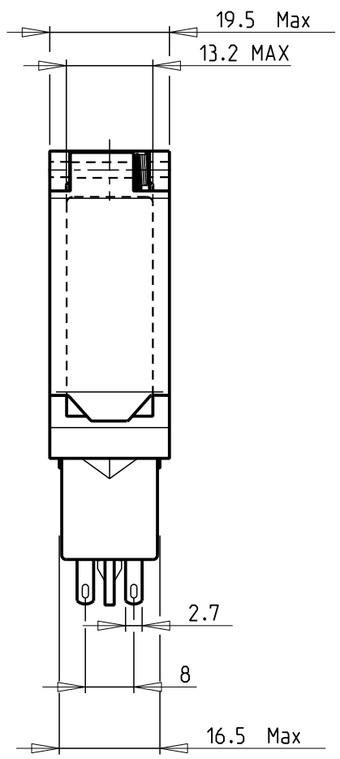

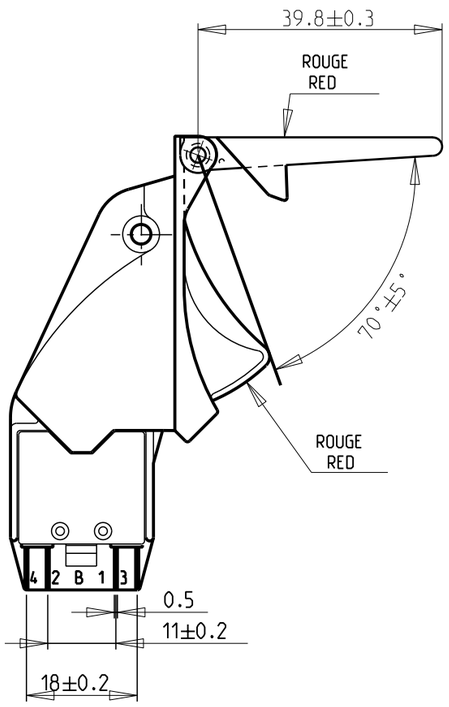

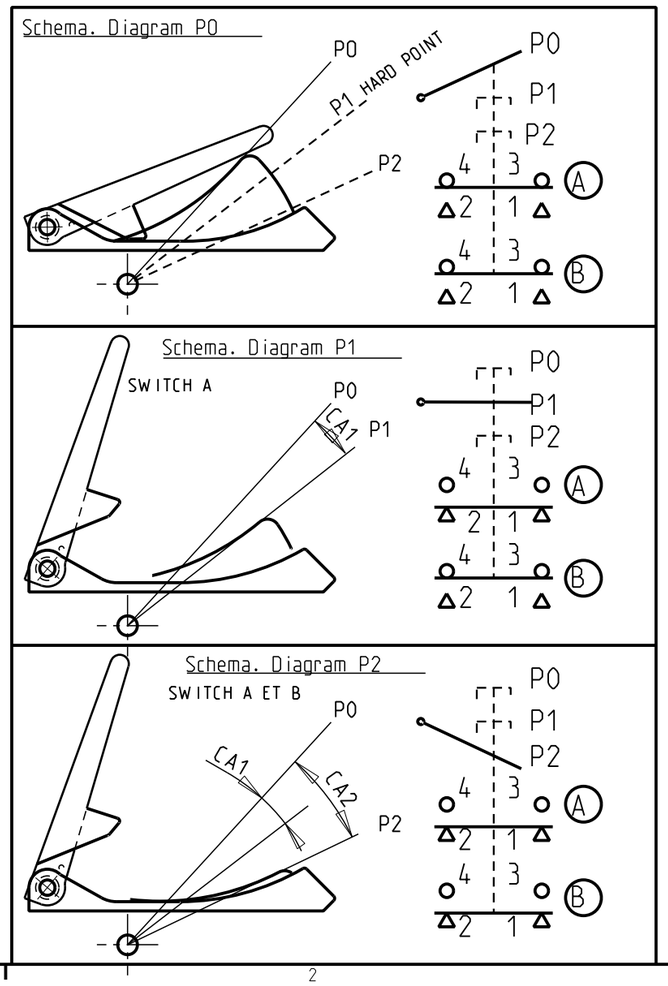

POSITION 1 ACTIONNABLE AVEC LA PALETTE
POSITIONS 1 ET 2 ACTIONNEES PALETTE RELEVEE

POSITION 1 OPERABLE WITH THE GUARD
POSITIONS 1 ET 2 OPERABLE WHEN THE GUARD IS LIFTED UP

* Caract. GENERALES

- Temperature d'emploi	
- Temperature de stockage	
- Protection face avant (MIL STD 810D/506-2/proced.II)	
- Rigidite dielectrique	
- Resistance d'Isolement	
- Masse	
- Matiere	

* GENERAL Caract.

- Ambiant Temperature range	-35° <⟷> +75°C
- Storage Temperature range	-55° <⟷> +85°C
- Front face drip.proof (MIL STD 810D/506-2/proced.II)	Goutte a goutte
- Dielectric withstanding voltage	500V
- Insulation resistance	>10MΩ sous 500Vcc
- Mass	27±2g
- Material	Thermoplastique Inox Thermoplast Stainless steel

* Caract. MECANIQUES

- Couple de Commande FC	
1er Circuit	
2me Circuit	
- Couple de relachement	
- Course d'Approche	
1er Circuit -> CA1	
2em Circuit -> CA2	
- Course Totale	
- Couple de pivotement palette	
- Vibrations Norme AIR 7306 Titre 3	
Sinusoidales Fasci. 41 tabl. 2	
Aleatoires Fasci. 42 Figure 17	
- Endurance Mecanique	

* MECANICAL Caract.

- Operate Torque FC	-
1st Circuit	0.3 N.m Max
2nd Circuit	0.5 N.m Max
- Release Torque	0.06 N.m Min
- Pre Travel	-
1st Circuit ->CA1	12° Max
2nd Circuit ->CA2	20° Max
- Total Travel	22° min
- Flap rotate torque	0.015 N.m Min
- Vibrations Air 7306 title 3	-
Sinusoidal Part 41 Table 2	-
Random Part 42 scheme 17	-
- Mechanical Endurance	100 000 Cycles

* Caract. ELECTRIQUES

- Tension d'Alimentation	
- Pouvoir de Coupure	
En circuit resistif	
En circuit selfique	
- Endurance Electrique	

* ELECTRICAL Caract.

- Nominal Voltage	30VDC ou 115VAC 400Hz
- Electrical Rating	-
Resistive circuit	6A
Inductive circuit	L/R=5ms 3A
Electrical Endurance	50 000 Cycles

83574511
Product:

B	CTP 9489 : CORRECTION TEMPERATURE D'UTILISATION	Modified by	F_MONCHAL 27/04/2011
		Verified by	L_JULLY 27/04/2011
		Authorized by	

Toler. gene. lin ± 0.1 mm
Toler. gene. Ang ± 1 degres

General Raw surface Ra

This document is the property of Crouzet-Automatismes.
It's contents cannot be reproduced or divulged without the company's written approval.
The product data and specifications found on this document
do not constitute any contractual obligation.
Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications.
All rights of reproduction, modification, reprinting, and translation reserved for all countries

Scale 1/1

Crouzet
2, rue du Dr ABEL
BP 59, 26902,
Valence CEDEX 9
France

Customer: | Customer Ref.:

Designation/FR: GACHETTE ETANCHE ROUGE 2 POSITIONS UNIPOLAIRE AVEC PALETTE ROUGE
Designation/GB: ONE POLE TWO POSITIONS TRIGGER WITH RED GUARD

PFT001:<C>;<M>
Dispatching D1

Department: CT
NATO code: FA0X2

Design by T_VINARD 27/10/2008
Verif. by A_BONNARD 27/10/2008
Authorized by

FICHE TECHNIQUE - DATA SHEET
FT83574511FR

Index	Format	Folio
B	A3	1/1