PRESENTATION

APPAREIL NON ETANCHE
A PALETTE DE SECURITE
PLATINE ET BOITIER EN POLYAMIDE 6-6 CHARGE F.V.
POUSSOIR EN RESINE ACETALE ROUGE
COSSES A SOUDER
CONTACTS EN ARGENT

CARACTERISTIQUES MECANIQUES

FORCE DE COMMANDE :
CIRCUITS 1 ET 2 12N MAXI.SUR R 15
FORCE DE COMMANDE :
CIRCUITS 3 ET 4 30N MAXI.SUR R 15
FORCE DE RELACHEMENT : 2N MIN. SUR R 15
COURSE D'APPROCHE CIRCUITS 1 ET 2 :12°MAXI.(CA1)
COURSE D'APPROCHE CIRCUITS 3 ET 4 :21°MAXI.(CA2)
COURSE TOTALE : 22° MIN. (CT)
ENDURANCE NECANIQUE : 100 000 CYCLES

CARACTERISTIQUES ELECTRIQUES

TENSION : 32VCC
CIRCUIT RESISTANT : 2A
ENDURANCE ELECTRIQUE : 100 000 CYCLES

CARACTERISTIQUES GENERALES

TEMPERATURE D'EMPLOI :-15°C A +60°C
TEMPERATURE DE STOCKAGE :-55°C A +85°C
MASSE : 0.0378 Kg ±5%

PRESENTATION

NON-PROOF TRIGGER
WITH PROTECTION PLATE
PLATE AND CASING : POLYAMIDE 6.6 REINFORCED FIBERGLASS
BUTTON : RED ACETATE RESIN
SOLDER TERMINAL
SILVER CONTACTS

MECHANICAL CHARACTERISTICS


OPERATING FORCE :
CIRCUITS 1 AND 2 12N MAXI.ON R 15
OPERATING FORCE :
CIRCUITS 3 AND 4 30N MAXI.ON R 15
RELEASE FORCE : .2N MIN. ON R 15
PRE TRAVEL CIRCUIT 1 AND 2 :12°MAXI.(CA1)
PRE TRAVEL CIRCUIT 3 AND 4 :21°MAXI.(CA2)
TOTAL TRAVEL : 22° MIN. (CT)
MECHANICAL ENDURANCE : 100 000 CYCLES

ELECTRICAL CHARACTERISTICS


VOLTAGE :32VDC
RESISTANT CIRCUIT : 2A
ELECTRICAL ENDURANCE : 100 000 CYCLES

GENERAL CHARACTERISTICS

OPERATING TEMPERATURE : -15°C TO +60°C
STORAGE TEMPERATURE :-55°C TO +85°C
WEIGHT : 1.071 oz ±5%

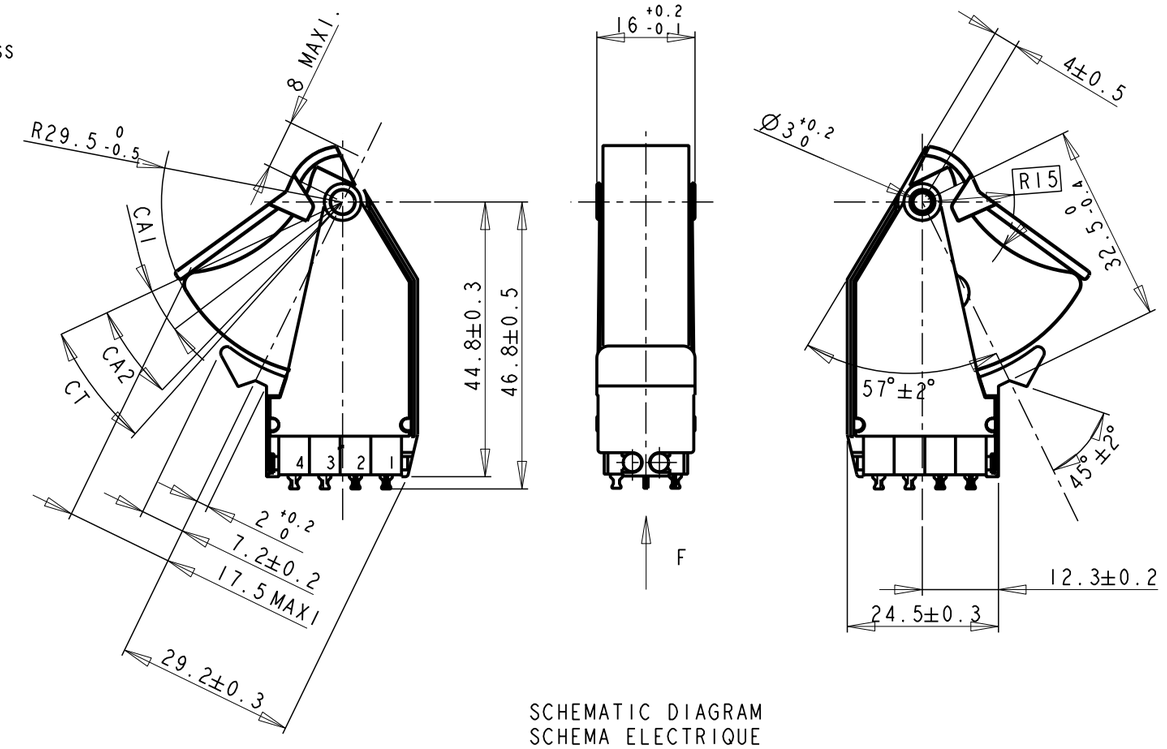

SCHEMATIC DIAGRAM
SCHEMA ELECTRIQUE

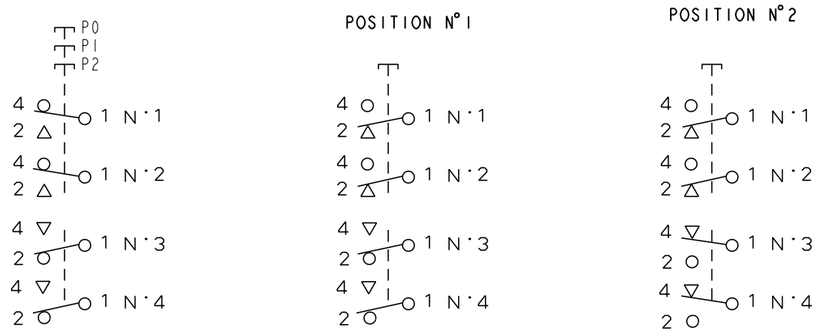


VUE SUIVANT F

VUE DE DESSOUS
REPERE DES BORNES
(NON MARQUE SUR LE PRODUIT)

VIEW ALONG F

UNDER VIEW
TERMINAL MARKER
(NO MARK ON THE PRODUCT)

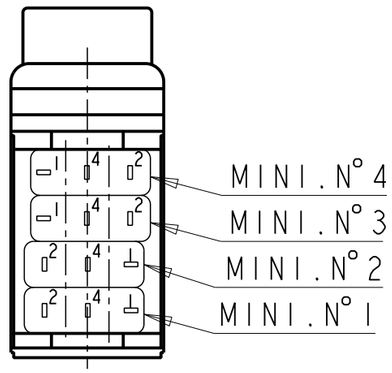

C	CTP 9369 Mise à jour des schémas électriques / Update schematic diagram	Modified by	D_DELIAUD 18/02/2010
		Verified by	F_MATTANA 18/02/2010
		Authorized by	

Toler. gene. lin ± mm
Toler. gene. Ang ± degres
General Raw surface Ra

This document is the property of Crouzet-Automatismes.
It's contents cannot be reproduced or divulged without the company's written approval.
The product data and specifications found on this document
do not constitute any contractual obligation.
Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications.
All rights of reproduction, modification, reprinting, and translation reserved for all countries

Scale 1/1

2, rue du Dr ABEL
BP 59, 26902,
Valence CEDEX 9
France

Department: CT
NATO code: FA0X2

Customer: DENEL
Customer Ref.:

Designation/FR: GACHETTE ROUGE BIPOLAIRE A 2 P. MOMENTANEES
Designation/GB: TWO POLES RED TRIGGER 2 P. MOMENTARY

PFT001:0<C>;0<M>
Dispatching D1

Design by F_MONCHAL 16/06/2005
Verif. by A_BONNARD 16/06/2005
Authorized by

DATA SHEET
FT83574013FR

Index	Format	Folio
C	A3	1/1

-
-
83574013
Product: