

› Expansion Modules

Digital Sandwich Extension

XE10

- › Can be used to reach up to 50 inputs/outputs in combination with the XR14 termination extension
- › Containing Relay outputs including one which is a changeover relay



XE10

Selection guide			
Inputs	Outputs	Power supply	XE10
6 digital	4 relays 5 A (including 1 changeover relay)	Via the 24 V $\overline{\text{DC}}$ controller	88970321
		Via the 100 → 240 V \sim	88970323
		Via the 24 V \sim	88970324
Our Part-Number System -			

Expandable Version

Expansion Modules

X R 06

Version
X: Expansion

Inputs/Output
03: 3 Pt100
04: 1 analog / 2 analog
05: Ethernet
06: 4 digital / 2 relay
10: 6 digital / 4 relay
14: 8 digital / 6 relay

X N 06

Version
X: Expansion

Communication
05: Ethernet
06: Modbus

Type
E: Digital sandwich extensions
R: Digital termination extensions
A: Analog termination extensions

Type
N: Sandwich communication extensions

You have a project? Contact us on www.crouzet.com

Description:

Millenium3: The reference for more than 15 years

The Millenium3 is a versatile, powerful logic controller designed to meet the needs of a wide range of industrial applications. Its ease of use and flexibility make it ideal for automation professionals.

It offers high reliability and accuracy, making it a trusted choice for your automation needs.

For more information about **Millenium3**: please visit www.crouzet.com


XE10

General environment characteristics	
Certifications	CE, UL, CSA, GL
Conformity to standards (with the low voltage directive and EMC directive)	IEC/EN 61131-2 (Open equipment) IEC/EN 61131-2 (Zone B) IEC/EN 61000-6-2 IEC/EN 61000-6-3 (*) IEC/EN 61000-6-4 (*) Except configuration (88 970 1X1 or 88 970 1X2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure)
Earthing	Not included
Protection rating	In accordance with IEC/EN 60529: IP40 on front panel IP20 on terminal block
Overvoltage category	3 in accordance with IEC/EN 60664-1
Pollution	Degree: 2 in accordance with IEC/EN 61131-2
Max operating Altitude	Operation: 2000 m Transport: 3048 m
Mechanical resistance	Immunity to vibrations IEC/EN 60068-2-6, test Fc Immunity to shock IEC/EN 60068-2-27, test Ea
Resistance to electrostatic discharge	Immunity to ESD IEC/EN 61000-4-2, level 3
Resistance to HF interference	Immunity to radiated electrostatic fields IEC/EN 61000-4-3 Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3 Immunity to shock waves IEC/EN 61000-4-5 Radio frequency in common mode IEC/EN 61000-4-6, level 3 Voltage dips and breaks (a) IEC/EN 61000-4-11 Immunity to damped oscillatory waves IEC/EN 61000-4-12
Conducted and radiated emissions	Class B (*) in accordance with EN 55022, EN 55011 (CISPR22, CISPR11) group 1 (*) Except configuration (88 970 1X1 or 88 970 1X2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure)
Operating temperature Millenium 3 Essential and extensions	-20 → +55 °C (+40 °C in a non-ventilated enclosure) in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2
Operating temperature Millenium 3 Smart	-20 → +70 °C except CB and XB versions in VDC: -30 → +70 °C (+40 °C in a nonventilated enclosure) in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2
Storage temperature Millenium 3 Essential and extensions	-40 → +70 °C in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2
Storage temperature Millenium 3 Smart	-40 → +80 °C in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2
Relative humidity	95 % max. (no condensation or dripping water) in accordance with IEC/EN 60068-2-30
Mounting	On symmetrical DIN rail, 35 x 7.5 mm and 35 x 15 mm, or on panel (2 x Ø 4 mm)
Screw terminals connection capacity	Flexible wire with ferrule = conductor: 0.25 to 2.5 mm ² (AWG 24 → AWG 14) conductors 0.25 to 0.75 mm ² (AWG 24 → AWG 18) Semi-rigid wire = 1 conductor: 0.2 to 2.5 mm ² (AWG 25 → AWG 14) Rigid wire = conductor: 0.2 to 2.5 mm ² (AWG 25 → AWG 14) conductors 0.2 to 1.5 mm ² (AWG 25 → AWG 16) Tightening torque = 0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm)

XE10


Schematics
Footprint
Version

XE10

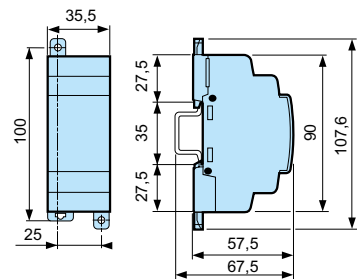


Digital "Sandwich" extensions
Inputs

XE10




XE10



Relay outputs

XE10



Warning:
The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.