



› NANO-PLC

em4 Ethernet & em4 Local

- › Up to 46 I/Os - Base 16 DI (4 HighSpeed/ 12 AI), 8 DO + 2 Solid State Relays
- › Analog Inputs 4-20 mA, 0-10 V_{DC} and 0-Vdc 12 bits
- › Ethernet Modbus TCP/IP (Client/Server) and Modbus RTU RS485 via interface (Client/Server)
- › Event management & datalog via mail or FTP server
- › PLC performance with the shape and ease of use of a logic controller

EM4B26-ET
Base 26 I/O EthernetEM4B26
Base 26 I/O Local

Product selection	
Type	Part number
EM4B26-ET	88 981 133
EM4B26	88 981 103

Kit Description	Part number
USB interface	88 980 110
USB cable 3m B type	88 980 170
Accessories Description	Part number
Starter Kit em4 Ethernet, Nano-PLC with embedded Ethernet, Ethernet cable	88 981 136
Starter Kit em4 local, Nano-PLC standalone, USB interface & cable	88 981 106
KIT em4 Ethernet , Nano-PLC with embedded Ethernet, Crouzet Touch CTP107-E Performance, Ethernet cable	88 970 567
KIT em4 Ethernet , Nano-PLC with embedded Ethernet, Crouzet Touch CTP110-E Performance, Ethernet cable	88 970 577

	EM4B26-ET	EM4B26
General features		
Ethernet Modbus TCP/IP (Client//Server)	Yes (16 IP range /// 24 words + 16 bits)	-
Modbus RTU (Client//Server)	Yes via interface (16 IP range /// 24 words + 16 bits)	
Datalog via mail or FTP	Yes (24 data channel; 68 000 recordings)	-
Event management via mail	Yes (24 events)	-
Bluetooth	Yes via interface	
Specific characteristics		
Part number	88 981 133	88 981 103
Finish	Glossy black	
On front panel color	Black RAL 9011	
On terminal block color	Blue RAL 5017	
Protection rating (in accordance with IEC/EN 60529)	IP 40 on front panel IP 20 on terminal block	
Weight	Without packing: 345 g With packing: 395 g	Without packing: 310 g With packing: 355 g
Dimensions	Without packing: 124.6 x 90 x 60.6 mm / 4.91 x 3.54 x 2.38 inch With packing: 148 x 103 x 65 mm / 5.83 x 4.06 x 2.56 inch	Without packing: 124.6 x 90 x 60.4 mm / 4.91 x 3.54 x 2.38 inch With packing: 148 x 103 x 65 mm / 5.83 x 4.06 x 2.56 inch
Programming / exploitation	Via USB, Bluetooth, Ethernet / Via Bluetooth, Ethernet	Via USB, Bluetooth / Via Bluetooth



	EM4B26-ET	EM4B26
Ethernet connection	Type RJ45, 10/100 Mbit/s, MDI/MDIX	-
Adressage	Static or dynamic (DHCP server / Auto IP)	-
Protocols	Modbus TCP (client / server), Discovery, UDP, TCP, FTP, SMTP (SSL/TLS), Workshop communication via Ethernet (SSL/TLS)	-
Cable length	Maximum length between 2 devices: 100 m / 3937 inch	-
Ethernet earthing	Yes, refer to the quick reference guide supplied with the product	-
General characteristics		
Products certification	CE, cULus Listed	
Conformity with the low voltage directive (in accordance with 2014/35/EU)	IEC/EN 61131-2 (Open equipment)	
Conformity with the EMC directive (in accordance with 2014/30/EU)	IEC/EN 61000-6-1 (Residential, commercial and light-industrial environments) IEC/EN 61000-6-2 (Industrial) IEC/EN 61000-6-3 (Residential, commercial and light-industrial environments) IEC/EN 61000-6-4 (Industrial)	
Power supply earthing	None	
Oversupply category	3 in accordance with IEC/EN 60664-1	
Pollution	Degree: 2 in accordance with IEC/EN 61131-2	
Maximum utilization altitude	Operation: 2000 m Transport: 3000 m	
Mechanical resistance	Immunity to vibrations IEC/EN 60068-2-6, Fc test Immunity to shock IEC/EN 60068-2-27, Ea test	
Resistance to electrostatic discharge	Immunity to ESD IEC/EN 61000-4-2, level 3	
Resistance to HF interference (Immunity)	Immunity to radiated electrostatic fields IEC/EN 61000-4-3, level 3 Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3 Immunity to shock waves IEC/EN 61000-4-5 Radio frequency in common mode IEC/EN 61000-4-6, level 3	
Conducted and radiated emissions (in accordance with EN 55022/11 group 1)	Class B	
Operation temperature	-20 (-4 °F) → +60 °C (140 °F) (+40 °C (104 °F) in a non-ventilated enclosure)	
Storage temperature	-40 (-40 °F) → +80 °C (176 °F)	
Relative humidity	95% max. (no condensation or dripping water)	
Screw terminals connection capacity	Flexible wire with ferrule: 1 conductor: 0.2 to 2.5 mm ² (AWG 24-14) Flexible wire with ferrule: 2 conductors: 0.2 to 0.75 mm ² (AWG 24-18) Rigid wire: 1 conductor: 0.2 to 2.5 mm ² (AWG 24-14) Rigid wire: 2 conductors: 0.2 to 0.75 mm ² (AWG 24-18) Tightening torque: 0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm) Stripping length: 6 mm	
Material	Lexan, UL94V0	
Environnement	Reach, RoHS, Halogen free 1272/2008/CE	
Processing characteristics		
LCD display	Display with 4 lines of 18 characters, white characters on a black background, reverse display function	
Programming method	FBD (Function Block Diagram), including SFC (Sequential Function Chart) (Grafset)	
Program size	Function blocks: typically 1000 blocks Macro blocks: 127 max. (255 blocks per macro)	
Program memory	Flash	
Removable memory	N.A	
Data memory	2 k octets	
Back-up time (in the event of power failure)	Program and settings in the controller: 10 years Data memory: 10 years	
Data back-up	Data backup in the flash memory is guaranteed if the product is powered on more than 10 seconds	



	EM4B26-ET	EM4B26
Cycle time	From 2 ms* to 90 ms, default value: 10 ms *: Depending on configuration	From 2 ms to 90 ms, default value: 10 ms
Clock data retention	10 years (lithium battery) at 25 °C (77 °F)	
Clock drift	Drift < 12 min/year (at 25 °C (77 °F)) 6 s / month (at 25 °C (77 °F) with user-definable correction of drift). Synchronizable by network	
Timer block accuracy	0.5 % ± 2 cycle time	
Start up time on power up	< 10 s base alone, < 5 s base + 2 expansions + 1 accessory (RS485)	< 3 s base alone, < 1.5 s base + 2 expansions + 1 accessory (USB, RS485...)
Self test	Test firmware integrity (checksum memory) Stability of the internal power supply Check the conformity of the em4 device configuration with the configuration in the application program.	
Supply		
Nominal voltage	24 V--- (-15% / +20%)	
Operating limits	20.4 - 28.8 V---	
Immunity from micro power cuts	≤ 1 ms (repetition 20 times)	
Max. absorbed power	5W @ 24 V---, 6.5 W @ 28.8 V---, - 0.3 W backlight OFF 1.5W @ 24 V--- (I/O + backlight) = 0	4W @ 24 V---, 5.3 W @ 28.8 V, - 0.3 W backlight OFF
Protection against polarity inversions	Yes	
Power monitoring	Yes and value available through the application "FB Status", 1/10V, 5%.	
Inputs		
Digital and high speed digital inputs 24 V--- - 4 inputs from I1 to I4		
Input used as digital input		-
Input voltage	24 V--- (-15% / +20%)	
Input current	1.8 mA @ 20.4 V 2.1 mA @ 24 V 2.5 mA @ 28.8 V	
Input impedance	11.6 kΩ	
Logic 1 voltage threshold	≥ 15 V---	
Making current at logic state 1	≥ 1.3 mA	
Logic 0 voltage threshold	≤ 10 V---	
Release current at logic state 0	≤ 0.8 mA	
Response time	1 to 2 cycle times	
Sensor type	Contact or 3-wire PNP	
Conforming to IEC/EN 61131-2	Type 1	
Input type	Resistive	
Isolation between power supply and inputs	None	
Isolation between inputs	None	
Protection against polarity inversions	Yes	
Status indicator	On LCD screen	
Cable length	≤ 100 m	
Input used as high speed digital input		
Maximum counting frequency	3 channels encoder (I1, I2, I3): 20 kHz* 2 independent counters (I1, I2) (I3, I4) (Cumul, IND, DIR): 2 channels: 40 kHz*, 4 channels: 20 kHz*, 2 independent counters (I1, I2) (I3, I4) (PH, PH2): 2/4 channels: 20 kHz* 4 independent counters (I1, I2, I3, I4) (Up/Down): 1 channel: 60 kHz*, 2 channels: 40 kHz*, > 2 channels: 20 kHz*	* with a time cycle ≤ 10 ms and a ton / toff = 50% ± 5%, level 0 < 2V and level 1 > 20.4V
Other functions	4 chronometers (I1, I2, I3, I4) 4 tachometers (I1, I2, I3, I4)	
Cable length	≤ 3 m with shielded twisted cable	



EM4B26-ET	EM4B26
-----------	--------

Digital 24 V--- and analog inputs 12 bits / 28.8 V - potentiometer - 8 inputs from I5 to IC**Input used as digital input**

Input voltage	24 V--- (-15% / +20%)
Input current	1.8 mA @ 20.4 V 2.1 mA @ 24 V 2.5 mA @ 28.8 V
Input impedance	11.6 kΩ
Logic 1 voltage threshold	≥ 11 V---
Making current at logic state 1	≥ 1 mA
Logic 0 voltage threshold	≤ 9 V---
Release current at logic state 0	≤ 0.7 mA
Response time	1 to 2 cycle times
Sensor type	Contact or 3-wire PNP
Conforming to IEC/EN 61131-2	Type 1
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
Protection against polarity inversions	Yes
Status indicator	On LCD screen
Cable length	≤ 100 m

Input used as analog input

Measuring range	0 → 10 V, 0 → V power supply or Voltmeter	0 → 10 V or 0 → V power supply
Input impedance	11.6 kΩ	
Maximum value without destruction	28.8 V---	max
Input type	Common mode	
Resolution	12 bit at maximum input voltage (10 bit at 10V)	12 bit at maximum input voltage (10.5 bit at 10V)
Value of LSB	7.03 mV	
Conversion time	Controller cycle time	
Maximum error in 0-10V mode	± 1.1 % of full scale at 25 °C (77 °F) ± 1.6 % of full scale at 55 °C (131 °F)	
Maximum error in 0-V power supply mode	± 2 % of full scale at 25 °C (77 °F) ± 3 % of full scale at 55 °C (131 °F)	
Repeat accuracy at 55 °C (131 °F)	± 0.5 %	
Voltmeter	from 0 to 30.5 V, 5%	
Isolation between analogue channel and power supply	None	
Protection against polarity inversions	Yes	
Potentiometer control	2.2 kΩ / 0.5 W (recommended), 10 KΩ max.	
Cable length	≤ 10 m with shielded twisted cable (sensor not isolated)	

Digital 24 V--- and analog inputs 12 bits / 10 V & 11 bits / 0-20 mA - 4 inputs from ID to IG**Input used as digital input (power off state)**

Input voltage	24 V--- (-15% / +20%)
Input current	1.5 mA @ 20.4 V 1.7 mA @ 24 V 2.1 mA @ 28.8 V
Input impedance	13.9 kΩ
Logic 1 voltage threshold	≥ 11 V---
Making current at logic state 1	≥ 0.8 mA
Logic 0 voltage threshold	≤ 8 V---
Release current at logic state 0	≤ 0.5 mA
Response time	1 to 2 cycle times



	EM4B26-ET	EM4B26		
Sensor type	Contact or 3-wire PNP			
Conforming to IEC/EN 61131-2	Type 1			
Input type	Resistive			
Isolation between power supply and inputs	None			
Isolation between inputs	None			
Protection against polarity inversions	No			
Status indicator	On LCD screen			
Cable length	≤ 100 m			
Input used as 0-10 V analog input				
Measuring range	0 → 10 V			
Input impedance	13.9 kΩ			
Maximum value without destruction	28.8 V--- max			
Input type	Common mode			
Resolution	12 bit / 10V			
Value of LSB	2.45 mV			
Conversion time	Controller cycle time			
Maximum error at 25 °C (77 °F)	± 0.8 % of full scale			
Maximum error at 55 °C (131 °F)	± 1.2 % of full scale			
Repeat accuracy at 55 °C (131 °F)	± 0.5 %			
Isolation between analogue channel and power supply	None			
Protection against polarity inversions	Yes for voltage ≤ 10 V			
Potentiometer control	2.2 kΩ / 0.5 W (recommended), 10 KΩ max.			
Cable length	≤ 10 m with shielded twisted cable (sensor not isolated)			
Input used as 0-20 mA analog input				
Measuring range	0 → 20 mA (4 → 20 mA by the application)			
Input impedance	245 Ω			
Maximum value without destruction	30 mA max			
Input type	Common mode			
Resolution	11 bit (normalized at 0 - 2000) / 20 mA			
Value of LSB	10 μA			
Conversion time	Controller cycle time			
Maximum error at 25 °C (77 °F)	± 1.2 % of full scale			
Maximum error at 55 °C (131 °F)	± 1.7 % of full scale			
Repeat accuracy at 55 °C (131 °F)	± 0.5 %			
Isolation between analogue channel and power supply	None			
Protection against polarity inversions	Yes			
Oversupply protection	Yes			
	If the input voltage is > 7 V, this one is automatically switched on 0-10V configuration.			
Cable length	≤ 30 m with shielded twisted cable (sensor not isolated)			
Outputs				
Digital / PWM solid state output - 2 solid state outputs from O1 to O2				
Output used as digital output				
Breaking voltage	10 → 28.8 V---			
Nominal voltage	12 / 24 V---			
Nominal current	0.5 A on resistive load @ 25 °C (77 °F)			
Max. breaking current	0.625 A			
Non repetitive overload current	1 A			
Maximum breaking current in the common	1 A			
Voltage drop	< 1 V for I = 0.5 A			



	EM4B26-ET	EM4B26																																				
Response time	Make = 1 cycle time + 30 µs typical Release = 1 cycle time + 40 µs typical																																					
Built-in protections	Against overloads and short-circuits: Yes Against over voltages (*): Yes Against inversions of power supply: Yes (*) In the absence of a volt-free contact between the output of the logic controller and the load																																					
Min. load	1 mA																																					
Galvanic isolation	No																																					
Cable length	≤ 10 m																																					
Truth table of the default	<table><thead><tr><th></th><th>Command</th><th>Output</th><th>Fault</th></tr></thead><tbody><tr><td>Normal condition</td><td>0</td><td>0</td><td>No</td></tr><tr><td></td><td>1</td><td>1</td><td>No</td></tr><tr><td>Overheating</td><td>0</td><td>0</td><td>No</td></tr><tr><td></td><td>1</td><td>0</td><td>Yes</td></tr><tr><td>Underpowered</td><td>0</td><td>0</td><td>X</td></tr><tr><td></td><td>1</td><td>0</td><td>X</td></tr><tr><td>Short circuit (current limit)</td><td>0</td><td>0</td><td>No</td></tr><tr><td></td><td>1</td><td>0</td><td>Yes</td></tr></tbody></table>		Command	Output	Fault	Normal condition	0	0	No		1	1	No	Overheating	0	0	No		1	0	Yes	Underpowered	0	0	X		1	0	X	Short circuit (current limit)	0	0	No		1	0	Yes	
	Command	Output	Fault																																			
Normal condition	0	0	No																																			
	1	1	No																																			
Overheating	0	0	No																																			
	1	0	Yes																																			
Underpowered	0	0	X																																			
	1	0	X																																			
Short circuit (current limit)	0	0	No																																			
	1	0	Yes																																			

Output used as PWM output

PWM frequency	14.11 Hz; 56.45 Hz; 112.90 Hz; 225.80 Hz; 451.59 Hz; 1758.24 Hz
PWM cyclic ratio	0 → 100 % 100 steps
PWM Max. error	≤ 2 % (from 10 % → 90 %)
Status indicator	On LCD screen
Cable length	≤ 10 m with shielded twisted cable
Distance between the power source and the static outputs	≤ 30 m

6 A relay output - 2 outputs from O3 to O4

Breaking voltage	250 V~ max
Breaking current	6 A Derating: UL: ≥ 45 °C (113 °F): 4A max
Maximum breaking current in the common	IEC @ 25 °C (77 °F): 12 A IEC @ 60 °C (140 °F) or UL: 10 A
Mechanical life	5 000 000 operations (cycles)
Electrical durability for 50 000 operating cycles	24 V--- tau = 0 ms: 6 A, tau = 7 ms: 3 A, tau = 15 ms: 1.8 A Usage category DC-12: 24 V, 6 A Usage category DC-14: 24 V, 1.8 A 250 V~ cos phi = 1: 6 A, cos phi = 0.7: 5 A, cos phi = 0.4: 2.5 A Usage category AC-12: 250 V, 6 A Usage category AC-13: 250 V, 5 A Usage category AC-15: 250 V, 2 A
Minimum switching capacity	100 mA (at minimum voltage of 12V)
Maximum operating rate	Off load: 10 Hz At operating current: 0.1 Hz
Voltage for withstanding shocks	In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV
Response time	Make = 1 cycle time + 8 ms typical Release = 1 cycle time + 4 ms typical
Built-in protections	Against short-circuits: None Against over voltages and overload: None
Status indicator	On LCD screen
Cable length	≤ 30 m

8 A relay output - 6 outputs from O5 to OA



	EM4B26-ET	EM4B26
Breaking voltage	250 V~ max	
Breaking current	8 A Derating: CEI \geq 55 °C (131 °F) or UL: \geq 45 °C (113 °F): 6A max	8 A, \geq 55 °C: 6 A
Maximum breaking current in the common	IEC @ 25 °C (77 °F): C3, C6: 8A; C4, C5: 16 A IEC @ 60 °C (140 °F) or UL: C3, C6: 8 A; C4, C5: 10 A	
Mechanical life	20 000 000 operations (cycles)	
Electrical durability for 50 000 operating cycles	24 V \equiv tau = 0 ms: 8 A, tau = 7 ms: 3 A, tau = 15 ms: 1.5 A Usage category DC-12: 24 V, 8 A Usage category DC-14: 24 V, 1.5 A 250 V \sim cos phi = 1: 8 A, cos phi = 0.7: 4.75 A, cos phi = 0.4: 3 A Usage category AC-12: 250 V, 8 A Usage category AC-13: 250 V, 4.3 A Usage category AC-15: 250 V, 1.5 A	
Minimum switching capacity	100 mA (at minimum voltage of 12V)	
Maximum operating rate	Off load: 10 Hz At operating current: 0.1 Hz	
Voltage for withstanding shocks	In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV	
Response time	Make = 1 cycle time + 10 ms typical Release = 1 cycle time + 5 ms typical	
Built-in protections	Against short-circuits: None Against over voltages and overload: None	
Status indicator	On LCD screen	
Cable length	\leq 30 m	

Schemes

Dimensions

Ethernet






Local



Connections


INPUTS

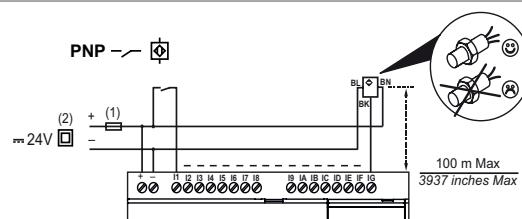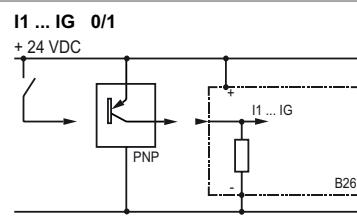

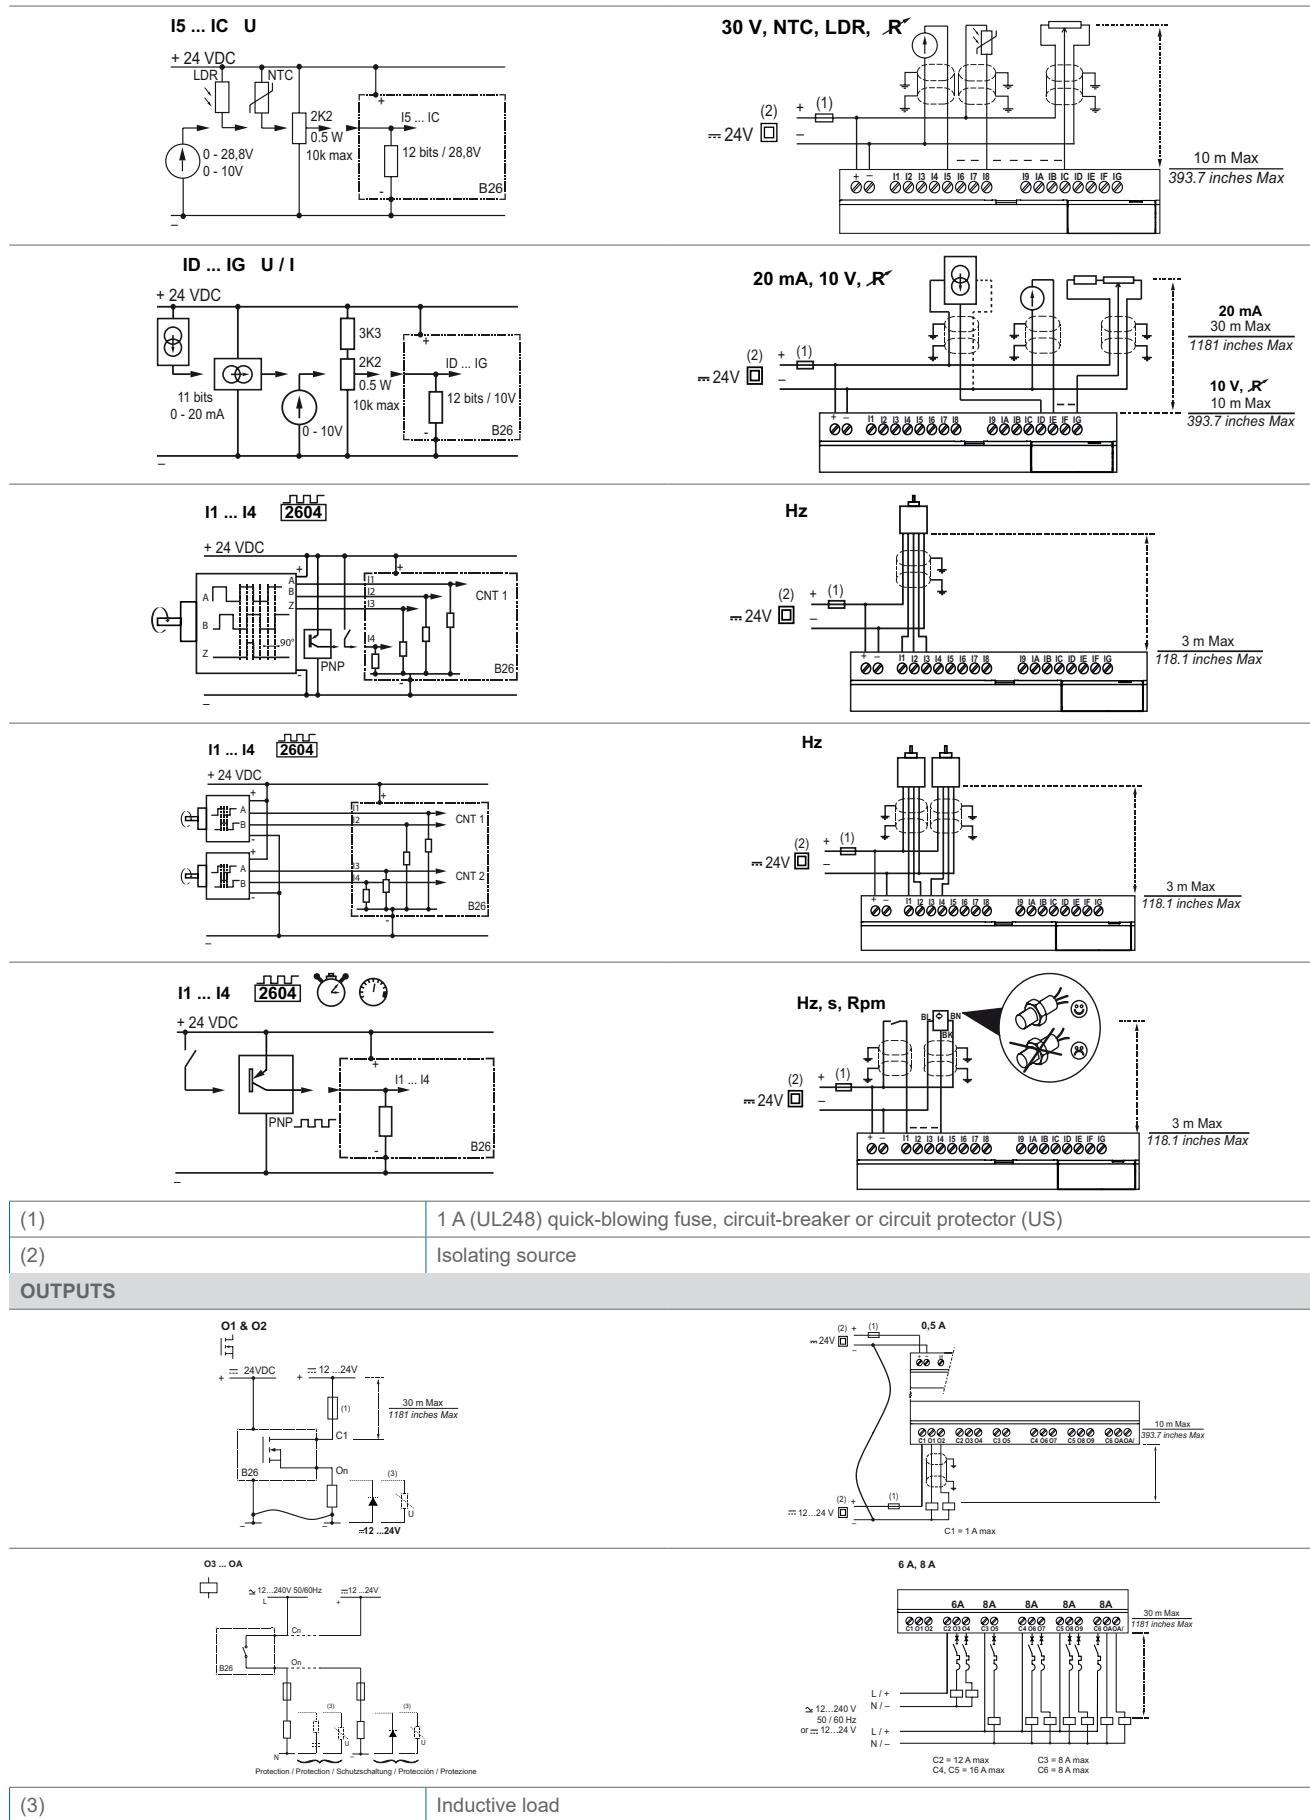



I/O Installations

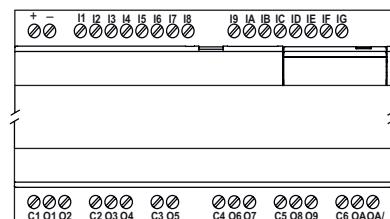

Warning:

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.