

Plug-in Analog Timers

11-Pin Version

Syr-line PU2R, PA2R, PC2R, PL2R Series

The Plug-in Analog Timers: a family of 11 timers with multifunction or monofunction, universal power supply, wide time range, with all the classic functions.



12-240
VAC/DC



IP40



11 Pins

Electrical Control & Protection > Timer Relays > Plug-in > **11 Pins**

Highlights

- Multifunction or monofunction
- Compact body for space saving
- Wide time range (0.5 s - 10 days delay)
- Universal power supply (12-240 VAC/DC)
- 1 or 2 relay outputs (SPDT / Changeover)
- Protective cover
- LED status indicator
- 3-wire PNP sensor compatible
- 11 Pins connections

Standards



Part Numbers

PU2R10MV1



Functions: Multifunction U (A, At, Ac, B, Bw, C, D, Di, H, Ht),
Ad - Instantaneous
Series: PU2R

PA2R10MV1



Functions: A, At
Series: PA2R

PC2R10MV1




Functions C
Series: PC2R

PL2R10MV1



Functions: L, Li
Series: PL2R

Part numbering system

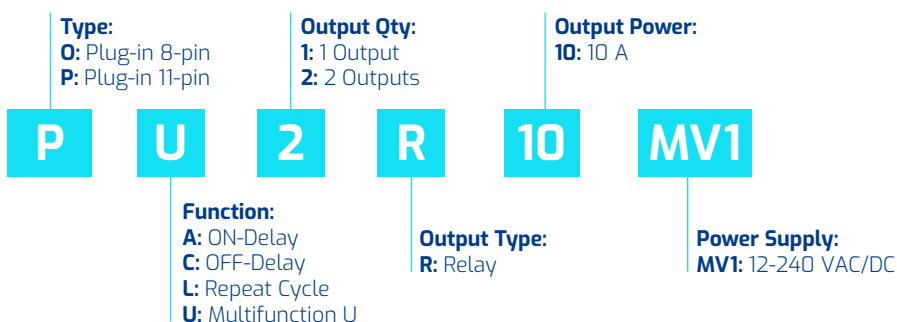

More info.



HERE ↓

Specifications

Specifications	PU2R10MV1	PA2R10MV1	PC2R10MV1	PL2R10MV1
Inputs				
Supply voltage	12-240 VAC/DC			
Voltage supply tolerance	-15%, +10%			
AC supply voltage frequency	50/60 Hz ± 5%			
Galvanic isolation of supply / inputs	No			
Max power consumption at Un	Approx. 3 VA (VAC) 1.5 W (VDC)			
Immunity to power micro cuts	10 ms			
Timing				
Timing ranges	IEC 1812-1: 0.5 s - 10 s, 0.05 min - 1 min, 0.5 min - 10 min, 0.05 h - 1 h, 0.5 h -10 h, 0.05 day - 1 day, 0.5 day - 10 days			
Minimum control pulse duration	IEC 1812-1 : 40 ms / 100 ms with load			
Recovery time (after by de-energization)	IEC 1812-1: 120 ms			
Repeatability	IEC 1812-1: ≤ ± 0.5%			
Setting accuracy (full range)	IEC 1812-1: ≤ ± 10%			
Drift temperature	≤ ± 0.05% /°C			
Drift voltage	≤ ± 0.2% / V			
Outputs				
Output configuration	2 CO (SPDT) (ChangeOver -Single Pole Double Throw-) R1: Follow timing function R2: Follow timing function / Instantenous			
Maximum switching voltage	250 VAC / 10 A resistive / 125 VDC / 0.3 A resistive			
Switching current rate (resistive)	NO/NC: 10 A 250 VAC / 10 A 30 VDC at 25°C NO/NC: 5 A 250 VAC / 5 A 30 VDC at 60°C			
Maximum switching power (resistive)	2500 VA / 300 W			
Electrical life (operations)	10 ⁵ cycles min at 250 VAC / 10 A resistive (NO only)			
Minimum breaking current	10 mA / 5 VDC			
Maximum rate (at max switching power)	360 cycles / h			
Mechanical life (operations)	10x10 ⁶ cycles			
Rated impulse voltage	4 kV (1.2/50 μs)			
Dielectric strength	Between coil / contacts (IEC 60664-1): 2.5 kV / 1 min / 1 mA / 50 Hz Between open contacts: 1 kV / 1 min / 1 mA / 50 Hz			
Insulation				
Rated insulation voltage	IEC 60664-1: 250 V			
Insulation coordination	IEC 60664-1: Overvoltage category III; pollution degree 2; up to 2000 m above sea level			
Rated impulse voltage	IEC 60664-1: 4 kV (1.2/50 μs)			
Clearance / creepage distances	IEC 60664-1: 3 mm / 3.2 mm			
Dielectric strength	EN-61812-1: 2.5 kV / 1 min / 1 mA / 50 Hz			
Insulation resistance	NFC 93 050: > 500 MΩ / 250 VDC / 1 min			

Specifications

	PU2R10MV1	PA2R10MV1	PC2R10MV1	PL2R10MV1
General characteristics				
Display	No but status indication (LED)			
Casing	35 mm			
Mounting	Mounting base-mounted on socket			
Housing material	UL94: enclosure plastic type V0			
Degree of protection	IEC 60529 : IP40			
Operating temperature	IEC 60068-2: -20°C to +60°C			
Storage temperature	IEC 60068-2: -40°C to +70°C			
Humidity	IEC 60068-2-30: 93% without condensation			
Vibration resistance	IEC 60068-2-6: ± 0.15 mm 10 Hz - 60 Hz / 2 g 60 Hz - 150 Hz			
Shock resistance	IEC 60068-2-27: 10 gn - 11 ms, 3x6 axis (Output non-energized) / 5 gn - 11 ms, 3x6 axis (Output energized)			
Drop to concrete floor	IEC 60068-2-32: Height: 0.75 m			
Weight	90 g (110 g with packaging)			
Standards				
EU Directives	2014/30/EU: EMC 2014/35/EU: Low voltage			
Approvals / marking	CE, cULus Listed Industrial Control Equipment			
Security standard	IEC 60664-1: Insulation coordination for equipment within low-voltage systems			
Conformity with environmental directives	2015/863/UE: RoHS 1907/2006: Reach 2012/19/UE: WEEE			
Product standard	IEC 61812-1: Specified time relays for industrial use UL 508 (60947-4-1): Industrial Control Equipment (NRNT- Industrial Control Switches) Refer to UL840 Insulation Coordination for Electrical Equipment			
Electromagnetic compatibility	Generic standards IEC 61000-6-2 Immunity for industrial environment IEC 61000-6-3 Emission residential environment IEC 61000-6-4 Emission industrial environment			
Immunity to electrostatic discharges	IEC 61000-4-2: Level III Air ± 8 kV / Contact ± 6 kV			
Immunity to radiated, radio-frequency, electromagnetic field	IEC 61000-4-3: Level III, 10 V/m (80 MHz to 1 GHz) 80% AM (1 kHz), 3 V/m (1.4 to 2 GHz) 80% AM (1 kHz), 1 V/m (2 to 2.7 GHz) 80% AM (1 kHz)			
Immunity to rapid transient bursts	IEC 61000-4-4: Direct ± 4 kV 5/50 Tr/Th ns 5 KKz & 100 KHz Capacitive coupling clamp ± 2 KV 5/50 Tr/Th ns 5 KHz & 100 KHz			
Immunity to shock waves on power supply	IEC 61000-4-5: Level III, line-to-earth ± 2 kV / line-to-line ± 1 kV			
Immunity to radiofrequency in common mode	IEC 61000-4-6: Level III, 10 Vrms (0.15 to 80 MHz) 80% AM (1 kHz)			
Immunity to voltage dips and breaks	IEC 61000-4-11: 0% residual voltage during 1 cycle (Crit. B) 40% residual voltage / 10 cycles 50 Hz / 12 cycles 60 Hz (Crit. C) 70% residual voltage / 25 cycles 50 Hz / 30 cycles 60 Hz (Crit. C) Short interruptions: 0% residual voltage / 250 cycles 50 Hz / 300 cycles 60 Hz (Crit. C)			

Specifications

PU2R10MV1

PA2R10MV1


PC2R10MV1

PL2R10MV1


Standards	
AC/DC main port emissions	IEC 61000-6-3 IEC 61000-6-4: CISPR 16-2-1 (7.4.1), CISPR 16-1-2 (4.3) 0.15 MHz – 0.5 MHz, 66 dB (μV) – 56 dB (μV) quasi-peak, 56 dB (μV) – 46 dB (μV) average 0.5 MHz – 5 MHz, 56 dB (μV) quasi-peak, 46 dB (μV) average 5 MHz – 30 MHz, 60 dB (μV) quasi-peak, 50 dB (μV) average CISPR 14-1 0.15 MHz – 30 MHz CISPR 16-2-1 (7.4.1), CISPR 16-1-2 (4.3) 0.15 MHz – 0.5 MHz, 79 dB (μV) quasi-peak, 66 dB (μV) average 0.5 MHz – 30 MHz, 73 dB (μV) quasi-peak, 60 dB (μV) average
Radiated emissions	IEC 61000-6-3 IEC 61000-6-4: CISPR 16-2-3 30 MHz – 230 MHz, 30 dB (μV/m) Quasi-peak at 10 m 230 MHz – 1 000 MHz, 37 dB (μV/m) Quasi-peak at 10 m Or: 30 MHz – 230 MHz, 40 dB (μV/m) Quasi-peak at 3 m in a semi-anechoic chamber 230 MHz – 1 000 MHz, 47 dB (μV/m) Quasi-peak at 3 m in a semi-anechoic chamber

Dimensions (mm)

Front View

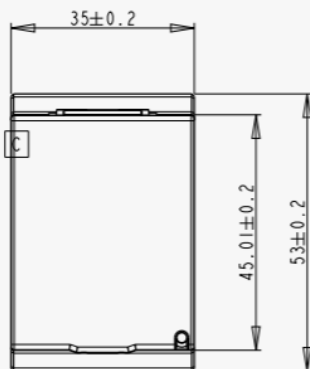

Side View

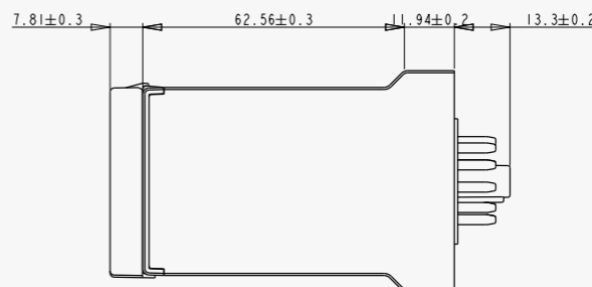


Accessories



Socket for DIN Rail or Panel Mount


Plug-In 11 Pins

25622080




Function diagrams


Function A: On-Delay (Delay on make)

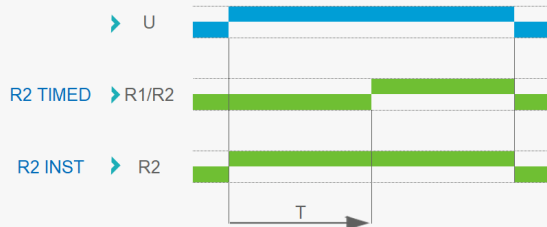


Function Ac: On/Off Delay (Delay on make/break)

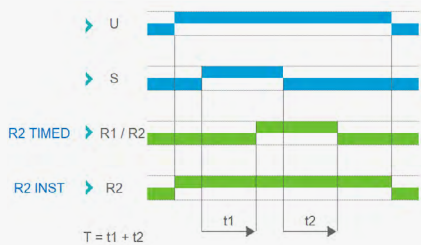

Function Ad: Delay on Start

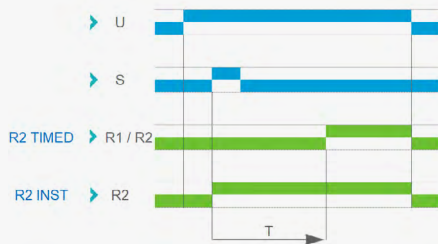


Function At: Summation Time Relay

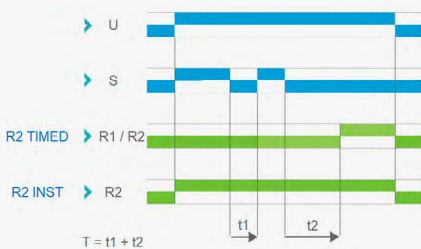


Function B: One-Shot




Function Bw: Pulse Output

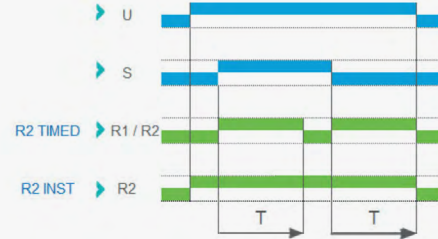


Function C: Off-Delay (Delay on brake)

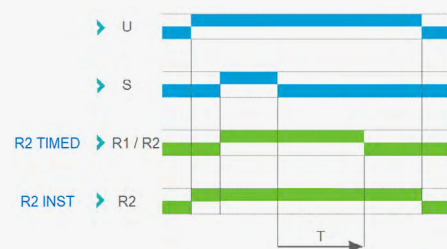


Function D: Flasher (Symmetrical) - OFF Start

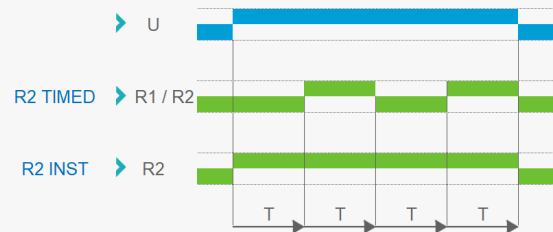

Function Di: Flasher (Symmetrical) - ON Start

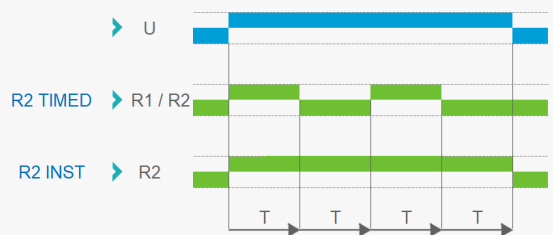


Function H: Interval

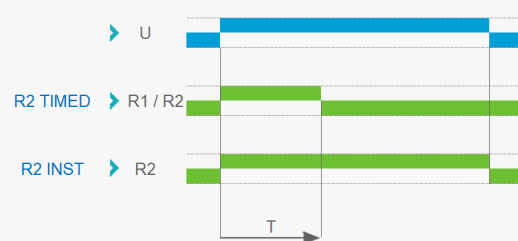


Function diagrams


Function Ht: Interval summation time relay

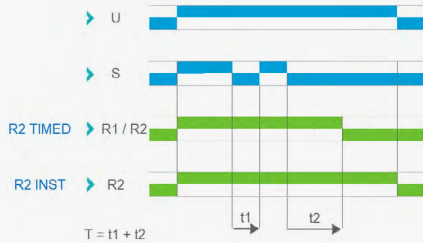

Function L: Recycler (OFF Start)

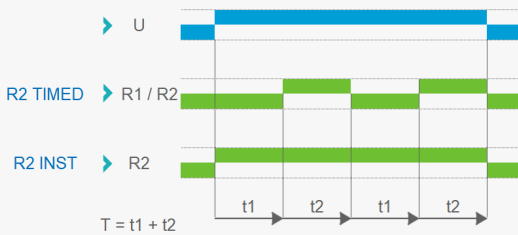


Function Li: Recycler (ON Start)

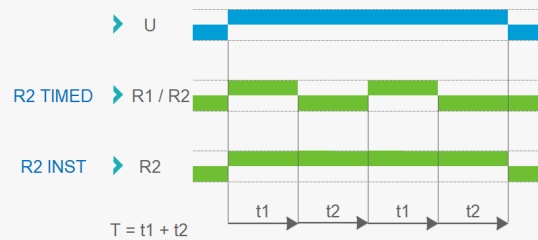


Wiring diagrams

PU2R10MV1 / PA2R10MV1 / PC2R10MV1

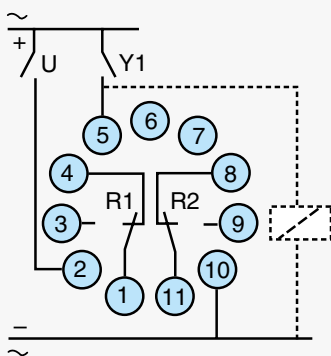

PL2R10MV1

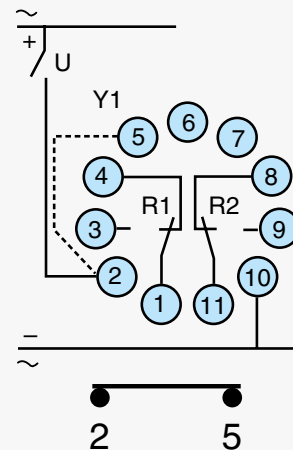

WARNING - The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet Automatismes SAS and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.