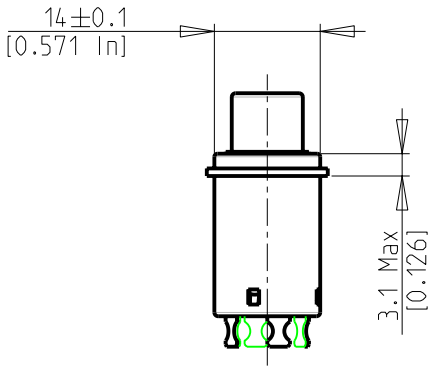


ENDURANCE MECANIQUE: 100 000 CYCLES

ETANCHEITE FACE AVANT SUIVANT:

MIL STD 810 D-506.2 METHODE 2

MECHANICAL STRENGTH: 100 000 CYCLES

WATERPROOF FRONT FACE IN COMFORMITY WITH:

MIL STD 810 D-506.2 METHODE 2

CARACTERISTIQUES ELECTRIQUES ELECTRICAL CHARACTERITICS

BAS NIVEAU

TENSION	30 VDC	VOLTAGE
COURANT	0.5 mA à 50 mA	CURRENT
ENDURANCE ELECTRIQUE PAR DIRECTION	100 000 cycles	ELECTRICAL LIFE PER DIRECTION

LOW CURRENT

AUTRES CARACTERISTIQUES.IDENTIQUE A : OTHER CHARACTERISTICS IDENTICAL TO :

FT83451001FR



83451004

Product:

A	IA2008029 : CREATION	Modified by	M_VERDIER	29/03/2010
		Verified by	F_MONCHAL	29/03/2010
		Authorized by		

Toler. gene. lin ± mm

Toler. gene. Ang ± degres

Crouzet

General Raw surface Ra

This document is the property of Crouzet-Automatismes.
It's contents cannot be reproduced or divulged without the company's written approval.
The product data and specifications found on this document do not constitute any contractual obligation.
Crouzet-Automatismes and its subsidiaries reserve the right to modify the specifications.
All rights of reproduction, modification, reprinting, and translation reserved for all countries

Scale 1/1

2, rue du Dr ABEL
BP 59, 26902,
Valence CEDEX 9
France

Customer: Customer Ref.:

Designation/FR: BOUTON POUSSOIR ETANCHE TACTILE INVERSEUR UNIPOLAIRE NOIR BN

Designation/GB: BLACK WATERPROOF PUSH-BUTTON TACTILE SINGLE POLE CHANGE OVER

PFT001:0<C>;0<M>

Dispatching D1

Department: CT

NATO code: FAOX2

Design by	M_VERDIER	29/03/2010
Verif. by	F_MONCHAL	29/03/2010
Authorized by		

DATA SHEET - FICHE TECHNIQUE

FT83451004FR

Index	Format	Folio
A	A4	1/1